

UNCLASSIFIED

AD 266 455

*Reproduced
by the*


ARMED SERVICES TECHNICAL INFORMATION AGENCY
ARLINGTON HALL STATION
ARLINGTON 12, VIRGINIA



UNCLASSIFIED

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.


DISCLAIMER NOTICE

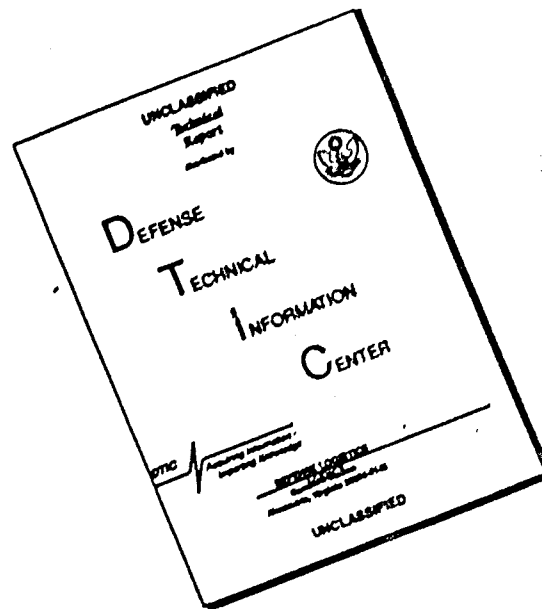

THIS DOCUMENT IS BEST QUALITY AVAILABLE. THE COPY FURNISHED TO DTIC CONTAINED A SIGNIFICANT NUMBER OF PAGES WHICH DO NOT REPRODUCE LEGIBLY.

STIA 266435

CAT.

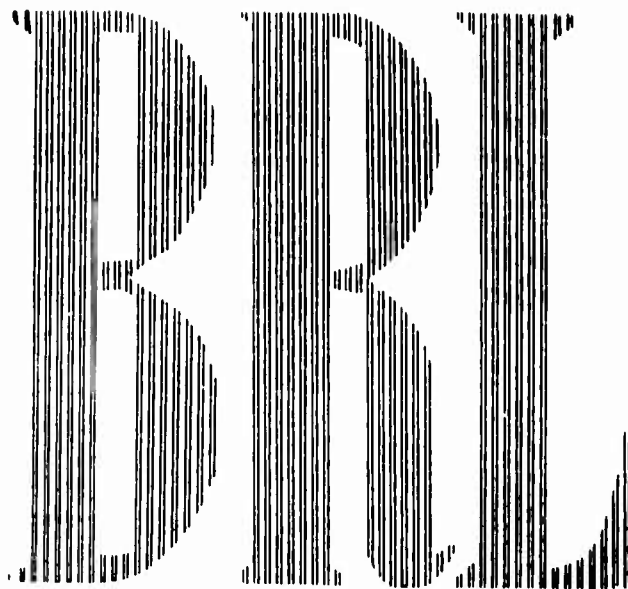


TECHNICAL NOTE NO. 1424
SEPTEMBER 1961

RELATIONSHIP BETWEEN ADDITIVE AND
NON-ADDITIVE QUANTUM FLUCTUATIONS

L. P. Bolgiano, Jr.

6-1-3

ALROX

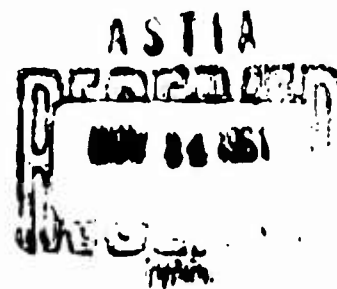

Department of the Army Project No. 503-05-023
Ordnance Management Structure Code No. 5210.11.167
BALLISTIC RESEARCH LABORATORIES



ABERDEEN PROVING GROUND, MARYLAND

BALLISTIC RESEARCH LABORATORIES

TECHNICAL NOTE NO. 1424

SEPTEMBER 1961

RELATIONSHIP BETWEEN ADDITIVE AND NON-ADDITIVE QUANTUM FLUCTUATIONS

L. P. Bolgiano, Jr.

Ballistic Measurements Laboratory

Department of the Army Project No. 503-05-023
Ordnance Management Structure Code No. 5210.11.167

ABERDEEN PROVING GROUND, MARYLAND

BALLISTIC RESEARCH LABORATORIES

TECHNICAL NOTE NO. 1424

LPBolgiano, Jr/bj
Aberdeen Proving Ground, Maryland
September 1961

RELATIONSHIP BETWEEN ADDITIVE AND NON-ADDITIVE QUANTUM FLUCTUATIONS

ABSTRACT

The limitation imposed by quantum mechanics on the measurement of electromagnetic signals may be viewed as a non-classical noise. Theory leads both to a minimum noise, which is additive in the sense of being independent of signal strength, and to a non-additive noise dependent on signal strength. The relationship between these two types of noise is discussed. Also a short derivation is given which exhibits their common relationship to the zero-point fluctuation attributed by quantum theory to the electromagnetic field.

In discussions of quantum noise limitations in masers^(1,2,3,4), there appear at first sight to be two separate types of quantum noise predicted. Spontaneous emission noise, or equivalently zero-point fluctuation of the field, leads to a minimum noise when no signal is present. On the other hand, the statistical nature of the amplification process which does not correlate specific output photons to specific input photons gives rise to an uncertainty in the precision with which the mean number of incident quanta, N , can be measured equal to the \sqrt{N} (for large N).

That some relationship should exist between these fluctuations is suggested by Heisenberg's⁽⁵⁾ derivation of the Einstein formula⁽⁶⁾ for fluctuations in black-body radiation. In this calculation the mean square "particle" fluctuation, equal to the number of quanta involved, results directly from the zero-point energy of the field oscillators. Serber and Townes⁽⁷⁾, in fact, point out that a \sqrt{N} fluctuation in signal energy can be obtained by assuming that the signal amplitude is augmented by a random fluctuation of amount corresponding to the in-phase component of a noise signal whose energy corresponds to the zero-point fluctuation.

We wish here to point out that, using a similar argument, it is possible to obtain a single formula which gives both the \sqrt{N} fluctuation expected for large N and also the minimum fluctuation $1/2 hf$ per degree of freedom expected for $N = 0$.

We begin by considering the description given by classical wave theory for a sine wave plus thermal noise. That is we assume a waveform representable by an equation of the form

$$I = A_s \cos \omega t + A_N(t) \cos (\omega t + \phi(t)) \quad (1)$$

where the signal amplitude A_s is constant and the random amplitude $A_N(t)$ and phase $\phi(t)$ of the noise vary slowly relative to ω . If this expression is squared to compute power, there result three terms corresponding to signal power, noise power, and beats between the two. It may seem strange to speak of beats when only one frequency appears

explicitly in equation (1). However, the slow variation of $A_N(t)$ and $\phi(t)$ could be equivalently represented by writing the noise as a Fourier expansion over a frequency band of width equal to the highest frequency contained in $A_N(t)$ and $\phi(t)$.

If we consider only time variations slow with respect to ω , the signal power term is steady and the noise power term fluctuates with a mean square fluctuation equal to the mean square noise power itself. The interaction term, which averages zero, alternately adds and subtracts from the total power contributing a mean square fluctuation proportional to the product of signal and noise power. The total mean square fluctuation in power which results may be expressed⁽⁸⁾ by

$$\overline{\Delta P^2} = \overline{P_N^2} + 2P_S \overline{P_N} \quad (2)$$

where P_S denotes signal power and $\overline{P_N}$ mean noise power.

In order to obtain an estimate of quantum fluctuations, we shall interpret this power fluctuation as an energy fluctuation per unit time at frequency f . We express the signal energy per unit time as Nhf , and take for mean noise power and mean square noise power $1/2 hf$ and $(1/2 hf)^2$ respectively, to correspond to the zero-point fluctuation. This gives for the mean square energy fluctuation

$$\begin{aligned} \overline{\Delta W^2} &= (1/2 hf)^2 + 2(Nhf) (1/2 hf) \\ &= (N + 1/4) (hf)^2, \end{aligned} \quad (3)$$

and for the root mean square fluctuation in energy

$$\sqrt{\overline{\Delta W^2}} = hf \sqrt{N + 1/4} \quad (4)$$

For large N this formula gives the non-additive \sqrt{N} fluctuation normally associated with Poisson's "law of rare events". For $N = 0$, it also gives the minimum zero-point fluctuation $1/2 hf$.

The significance of the non-additive \sqrt{N} fluctuation for microwave radiometry was discussed in a previous paper⁽⁹⁾. Since only the non-additive quantum fluctuation was considered, it was necessary to qualify the results as applying only if N is not too small. The derivation given here suggests that this restriction might be removed by replacing N by $N + 1/4$ in the formula found for the mean square energy fluctuation.

L. P. Bolgiano Jr.
L. P. BOLGIANO, JR.

REFERENCES

1. Siegman, A. E. Zero-point Energy as the Source of Amplifier Noise. Proc. IRE 49, 633 (1961).
2. Siegman, A. E. Thermal Noise in Microwave Systems, Part III. Microwave Journal 4, 93-104 (1961).
3. Shimoda, K., Takahasi, H. and Townes, C. H. Fluctuations in Amplification of Quanta with Applications to Maser Amplifiers. J. Phys. Soc. Japan 12, 686 (1957).
4. Stern, T. E. Information Rates in Photon Channels and Photon Amplifiers. IRE Int'l Conv. Rec. pt. 4, 182-188 (1960) - especially formula (11) page 184.
5. Heisenberg, W. The Physical Principles of the Quantum Theory. Dover Publications, New York (1930), page 100.
6. Einstein, A. Zum gegenwertigen Stand des Strahlungsproblems. Phys. Zeitschrift 10, 185-193 (1909).
7. Serber, R. and Townes, C. H. Limits on Electromagnetic Amplification due to Complementarity. Quantum Electronics, ed. by C. H. Townes, Columbia University Press, New York (1960), page 238.
8. Brillouin, L. Science and Information Theory. Academic Press, New York (1956) pp. 257-8.
9. Bolgiano, L. P., Jr. Quantum Fluctuations in Microwave Radiometry. IRE Trans. on E.T. and T. MTT - 9, 315-321 (1961).

DISTRIBUTION LIST

| <u>No. of Copies</u> | <u>Organization</u> | <u>No. of Copies</u> | <u>Organization</u> |
|--------------------------|---|--------------------------|--|
| 1 | Chief of Ordnance ATTN: ORDTB - Bal Sec Department of the Army Washington 25, D.C. | 1 | Commander New York Naval Shipyard Material Laboratory ATTN: Mr. D. First - Code 932 Brooklyn 1, New York |
| 1 | Commanding Officer Diamond Ordnance Fuze Laboratories ATTN: Technical Information Office - Branch O-1 Washington 25, D.C. | 1 | Commander Naval Missile Center ATTN: Librarian Point Mugu, California |
| 10 | Commander Armed Services Technical Information Agency ATTN: TIPCR Arlington Hall Station Arlington 12, Virginia | 1 | Commander Naval Ordnance Laboratory ATTN: Librarian White Oak, Silver Spring 19, Maryland |
| 10 | Commander British Army Staff British Defence Staff (W) ATTN: Report Officer 3100 Massachusetts Avenue, N.W. Washington 8, D.C. | 1 | Commander U.S. Naval Ordnance Test Station China Lake, California |
| 4 | Defence Research Member Canadian Joint Staff 2450 Massachusetts Avenue, N.W. Washington 8, D.C. | 1 | Commanding Officer & Director U.S. Navy Electronics Laboratory ATTN: Dr. T.H. Keary - Code 230 Point Loma San Diego 52, California |
| 3 | Chief, Bureau of Naval Weapons ATTN: DIS-33 Department of the Navy Washington 25, D.C. | 1 | Director U. S. Naval Research Laboratory ATTN: Librarian Washington 25, D.C. |
| 1 | Chief, Bureau of Ships ATTN: Code 838 Department of the Navy Washington 25, D.C. | 2 | Commander U.S. Naval Weapons Laboratory Dahlgren, Virginia |
| 1 | Chief of Naval Research ATTN: Code 427 Department of the Navy Washington 25, D.C. | 1 | Commander Air Force Cambridge Research Laboratory ATTN: Mr. C.J. Sletten L.G. Hanscom Field Bedford, Massachusetts |

DISTRIBUTION LIST

| <u>No. of Copies</u> | <u>Organization</u> | <u>No. of Copies</u> | <u>Organization</u> |
|--------------------------|--|--------------------------|---|
| 1 | Commander Rome Air Development Center ATTN: Librarian Griffiss Air Force Base Rome, New York | 1 | Director Coles Signal Laboratory, SCEL ATTN: Radio Communication Branch Fort Monmouth, New Jersey |
| 1 | Commander Air Force Missile Test Center ATTN: Librarian Patrick Air Force Base, Florida | 1 | Director Evans Signal Laboratory ATTN: Librarian Belmar, New Jersey |
| 1 | Commander Aeronautical Systems Division ATTN: Librarian Wright-Patterson Air Force Base, Ohio | 1 | Army Research Office Arlington Hall Station Arlington, Virginia |
| 2 | Commanding General Army Rocket & Guided Missile Agency ATTN: ORDXR-CTH Mr. G. Hobert - Ordnance Missile Laboratory Redstone Arsenal, Alabama | 1 | Commanding Officer Army Research Office (Durham) Box CM, Duke Station Durham, North Carolina |
| 6 | Commanding General ATTN: ORDBS-FDL, Mr. B. Boone ORDBS-FDL-H RTDD, TRM - Mr. Robert Nelson Mr. Dieter Holberg Mr. Wollenberg Librarian White Sands Missile Range, New Mexico | 1 | NASA Goddard Space Flight Center 4555 Overlook Avenue, S.W. Washington 25, D.C. |
| 1 | Chief Signal Officer ATTN: SICE-PI Department of the Army Washington 25, D.C. | 1 | Director National Bureau of Standards ATTN: Librarian U.S. Department of Commerce Boulder Laboratories Boulder, Colorado |
| 1 | Commanding Officer U.S. Army Signal Engineering Agency ATTN: Librarian Arlington Hall Station Arlington, Virginia | 2 | Director, National Security Agency ATTN: RADE-1 Mr. Manning Fort George G. Meade, Maryland |
| 1 | Commanding General U.S. Army Signal Engineering Laboratories ATTN: Librarian Fort Monmouth, New Jersey | 1 | Applied Physics Laboratory The Johns Hopkins University ATTN: Librarian 8621 Georgia Avenue Silver Spring, Maryland |
| | | 3 | Jet Propulsion Laboratory ATTN: Dr. E. Rechtin - Electronics Research Scientist Mr. Robertson Stevens 4800 Oak Grove Drive Pasadena 3, California |

DISTRIBUTION LIST

| <u>No. of Copies</u> | <u>Organization</u> | <u>No. of Copies</u> | <u>Organization</u> |
|--------------------------|---|--------------------------|---|
| 1 | Electrac Space Electronics Laboratory ATTN: Mr. Louis Katz 557 E West Valencia Fullerton, California | 1 | The Ohio State University Research Foundation 1314 Kinnear Road Columbus, Ohio |
| 1 | Federal Telecommunication Laboratory 500 Washington Avenue Nutley, New Jersey | 1 | Polytechnic Institute of Brooklyn Microwave Research Institute 55 Johnson Street Brooklyn 1, New York |
| 1 | Hughes Aircraft Company Florence Avenue at Teal Street Culver City, California | 2 | Stanford Research Institute ATTN: Antenna System Laboratory - Dr. Tetsu Morita Mr. William Scharfman Menlo Park, California |
| 1 | Interstate Engineering Corporation 707 East Vermont Avenue Anaheim, California | 1 | Mr. E. A. Blas Lockheed Aircraft Corporation Department 52-32, Building 130 Sunnyvale, California |
| 1 | The Martin Company ATTN: Librarian Baltimore 3, Maryland | 1 | Dr. Ronald W. Bracewell Stanford University Stanford Electronics Laboratories Stanford, California |
| 1 | The Ralph M. Parson Company 151 South DeLacey Avenue Pasadena 2, California | 1 | Dr. C. W. Gardiner New Mexico State University Physical Science Laboratory University Park, New Mexico |
| 1 | Raytheon Manufacturing Company Government Contracts Division 100 River Street Waltham 54, Massachusetts | 1 | Dr. Winston M. Cottschalk Radio Corporation of America Plasma Research Section Moorestown, New Jersey |
| 1 | RCS Laboratories Rocky Point Long Island, New York | 1 | Dr. A. J. Mallinckrudt 14141 Stratton Avenue Santa Anna, California |
| 1 | Columbia University Electronics Research Laboratory ATTN: Mr. Louis Lambert 632 West 125th Street New York 27, New York | 1 | Dr. Anthony E. Siegman Stanford University Stanford Electronics Laboratories Stanford, California |
| 1 | Massachusetts Institute of Technology Research Laboratory of Electronics ATTN: Librarian Cambridge 39, Massachusetts | | |

DISTRIBUTION LIST

| <u>No. of Copies</u> | <u>Organization</u> |
|--------------------------|---|
| 1 | Dr. Thomas E. Stern Columbia University Electrical Engineering Department New York, New York |
| 1 | Dr. Joseph Weber University of Maryland Electrical Engineering Department College Park, Maryland |